
AMORIM WISE

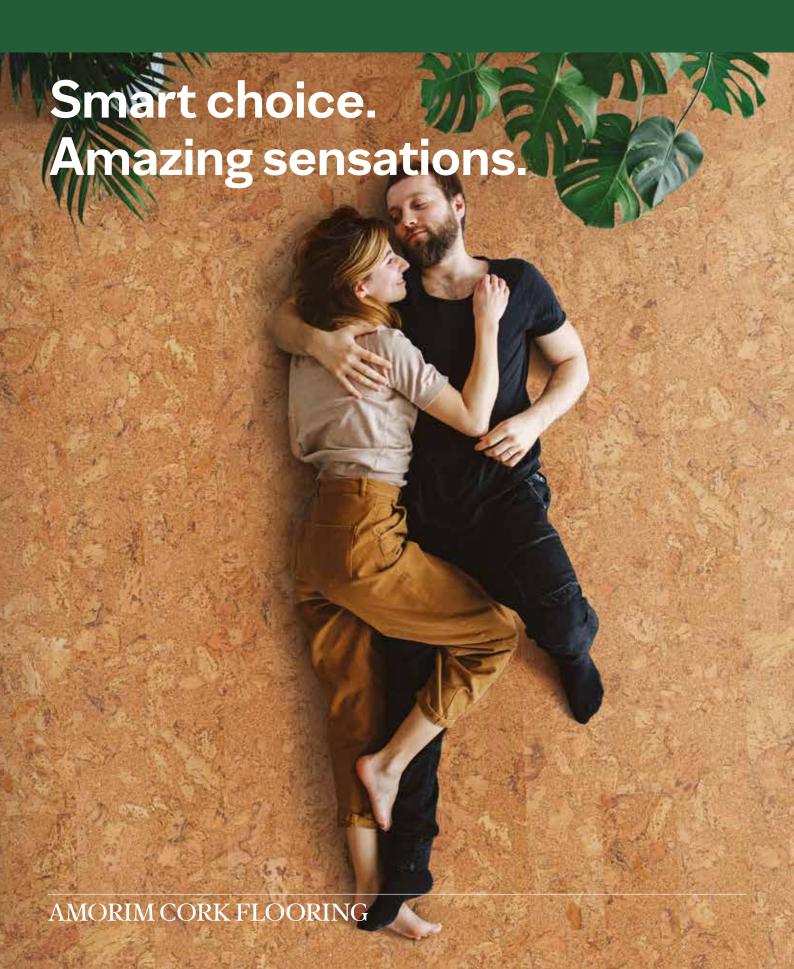

AMORIM WISE

WISDOM

Amorim WISE people apply experience, knowledge and ethics to make choices. They know that a clean environment is vital and that cork is the perfect solution for their homes. This is wisdom. This is being Amorim WISE.

IMAGINATION

Can we imagine the future? Yes. Taking the facts into our own hands allows us to build the future as planned. Amorim WISE people are creative and expect more from brands. They want innovation, creativity and insightful products. Amorim WISE answers to these demands by providing cutting-edge solutions.

SUSTAINABLE

Adopting a sustainable lifestyle is, more and more, a commitment made by people.


Then it's natural to experiment and adopt sustainable practices. Amorim WISE is the brand that addresses this increasingly demanding public.


ENTHUSIASM

Despite everyday concerns, enthusiasm is one of the characteristics of Amorim WISE people. This attribute inspires contemporary generations to believe in a better future and to act for change. Because of technology, sustainability or new lifestyles.


Why Amorim WISE? Because when these people find a brand capable of expressing that idea, the path to partnership is open.



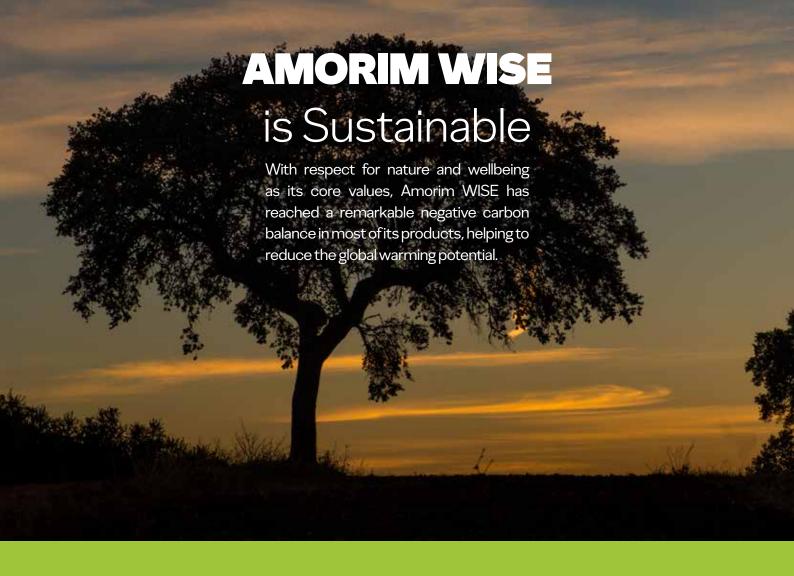

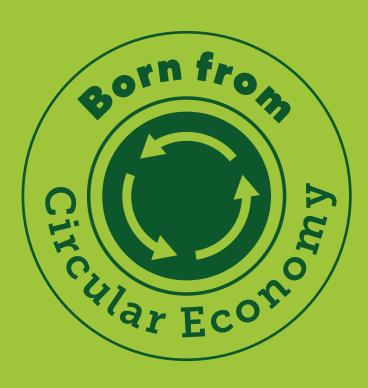

Amorim WISE floors are the purest outcome of a Circular Economy model that aims to turn waste and used cork stoppers into a valuable and sustainable product.

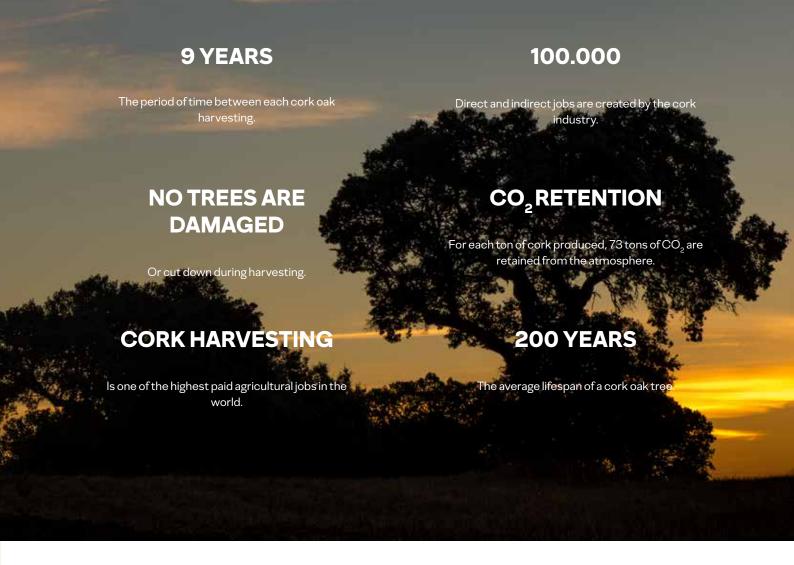

Sustainable by heart



Environment

Cork harvesting does not affect the retention capacity of the cork oak forest.



Close distances

Factories are located within few kms from the forests.



Economy

The cork oak forest creates jobs in the cork industry and in other related industries.



Reincorporation of waste

Any cork waste and surplus is collected, granulated and reincorporated in the production process, originating a lower carbon footprint.



Social Impact

The cork industry promotes settlement in areas at risk of desertification. Cork harvesting is an activity that crosses generations.



Biomass

The dust from the production lines is vacuumed and conducted to silos, where it is burned to generate energy through biomass. More than 60% of our energy comes from cork dust.



COPK inspire 700 HRT	10
COrk pure floor & wall concept	18
dekwall	24
WOOd inspire 700 HRT	32
WOOd inspire 700 SRT	38
wood pro	46
stone inspire 700 HRT	51
stone pure HRT	52

Your feet will love this soft walk.

Amorim WISE has a modern design with the trendiest colours available in Cork, Wood and Stone looks. This means you can have unique and distinctive spaces: beautiful to see, comfortable to walk on.

The comfort of AMORIM WISE



INDOOR AIR QUALITY

Compliance with the strictest indoor air quality standards after being tested on over 2000 potential chemicals.



WALKING COMFORT

Superior sense of comfort, even when walking barefoot.



NATURAL THERMAL INSULATION

Optimal floor temperature all year round.



IMPACT RESISTANCE

Highest shock absorbing performance.



SILENCE

Walking sound reduction up to 53%.



COTK inspire 700 HRT

A sustainable flooring solution, with a remarkable negative carbon balance and a waterproof multilayered cork structure. The cork designs give the floor a distinctive look and personality, where each plank is unique by Nature. The natural touch and feel, combined with the highly resistant HRT finish, is the best solution for those who prefer a flooring with superior comfort and excellent thermal and acoustical performance.



Formats

1225 x 190 x 7 mm





Floating

4 side micro bevel



Finishing & Warranty



HRT - HIGH RESISTANCE TECHNOLOGY

Highly elastic resin, resulting on a natural and flexible surface with a superior wear resistance. HRT is micro scratch resistant, prevents color shading and provides a warm and pleasant feeling on touch. HRT is produced with environmentally sustainable materials.














AA8L001 Fashionable Cement 80000096




AA8M001 Fashionable Grafite 80000097



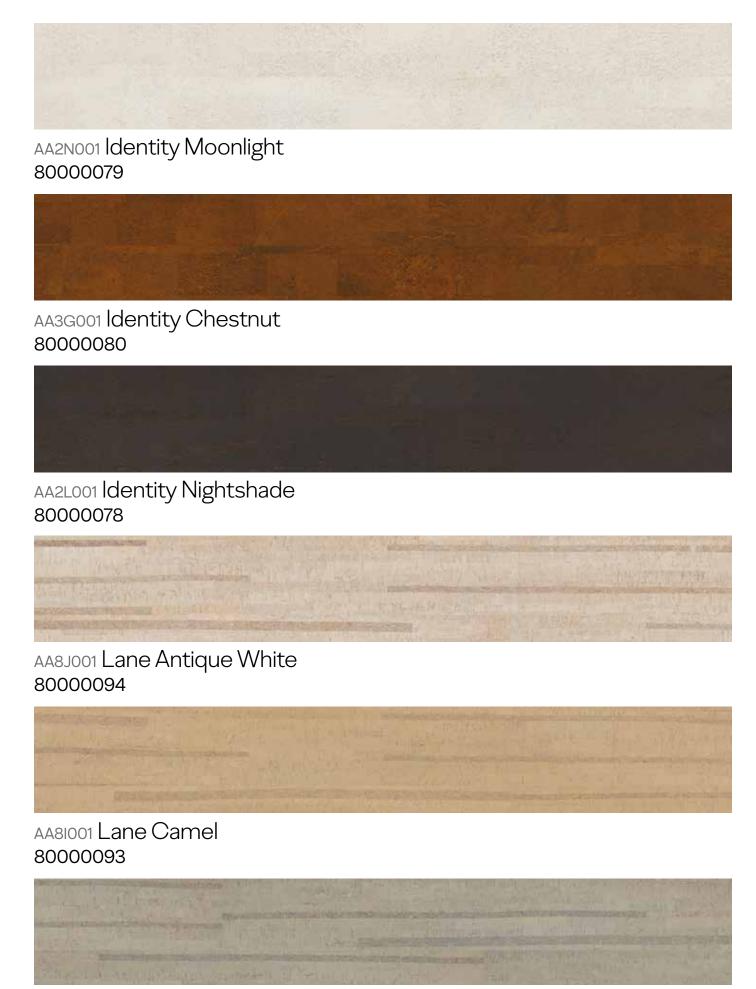

AA8H001 Lane Antracite 80000092

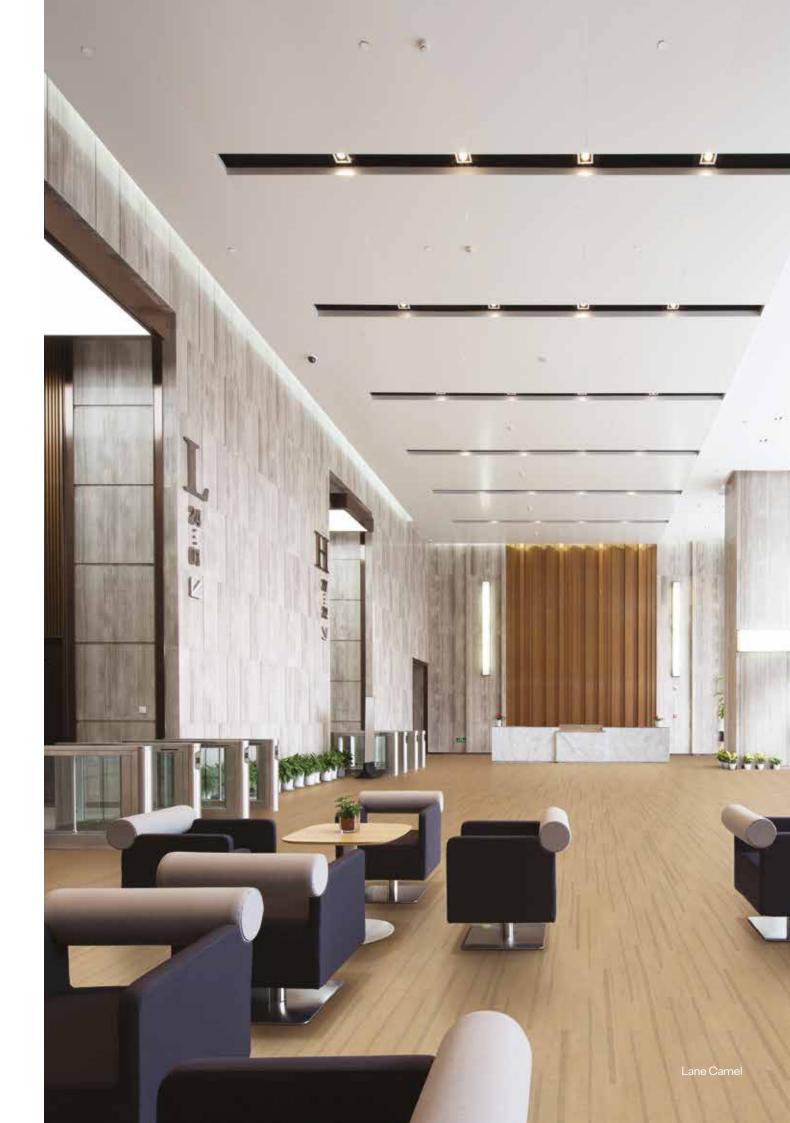





AA8E001 Originals Shell 80000089



AA8F001 Originals Harmony 80000090




AA8G001 Originals Rhapsody 80000091



AA8D001 Shell Marfim 80000088



AA8C001 Shell Jasmim 80000087

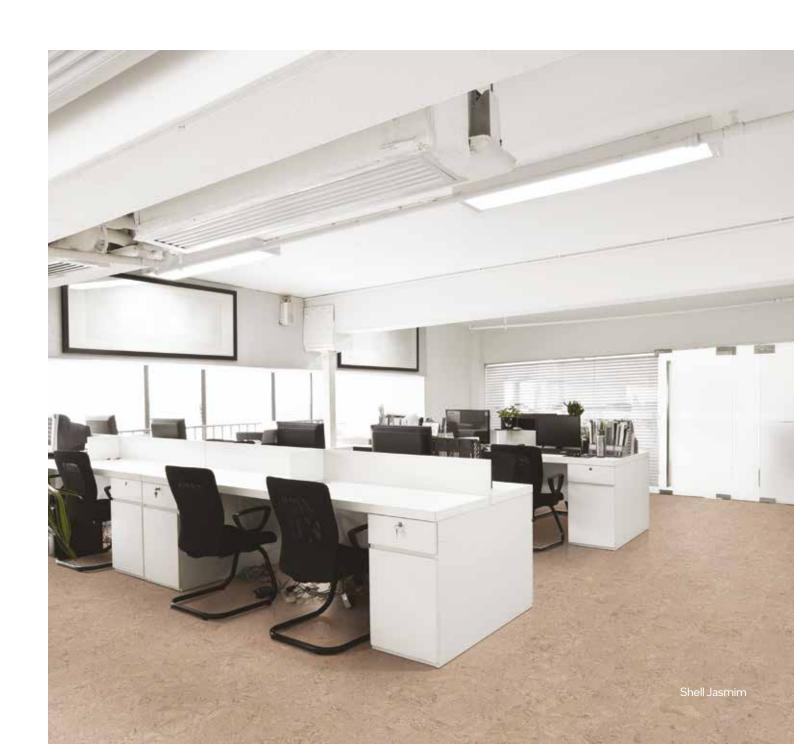



AA8A001 Traces Marfim 80000085



AA7Z001 Traces Jasmim 80000084



AA8B001 Traces Natural 80000086



AA4N001 Traces Spice 80000082



AA4M001 Traces Tea 80000081



AA5R001 Traces Chestnut 80000083





The handmade cork veneers are unique, assuring no repetitions and that each plank has a distinctive character. The glue down installation system allows additional creativity on the design patterns for floor&wall, enabling the creation of special spaces. The natural cork structure provides superior comfort and environmental performance for residential and commercial areas. The Glue down installation system allows for both Floor&Wall application, enabling the conception of special spaces with increased creativity on the design patterns.



Formats

600 x 300 x 4 mm



Finishing & Warranty (floor only)



PU Prefinished







 $^{^{\}star}$ Must be varnished on-site with minimum one coat of W-2000 or another recommended varnish.





Available in 10 colours & 10 cork patterns

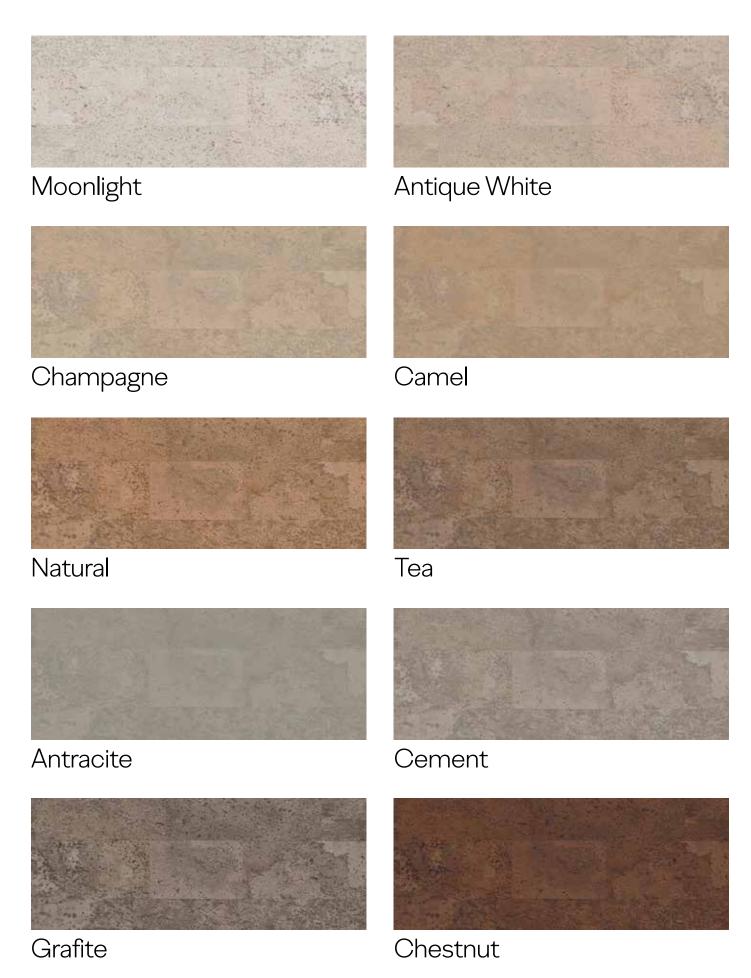

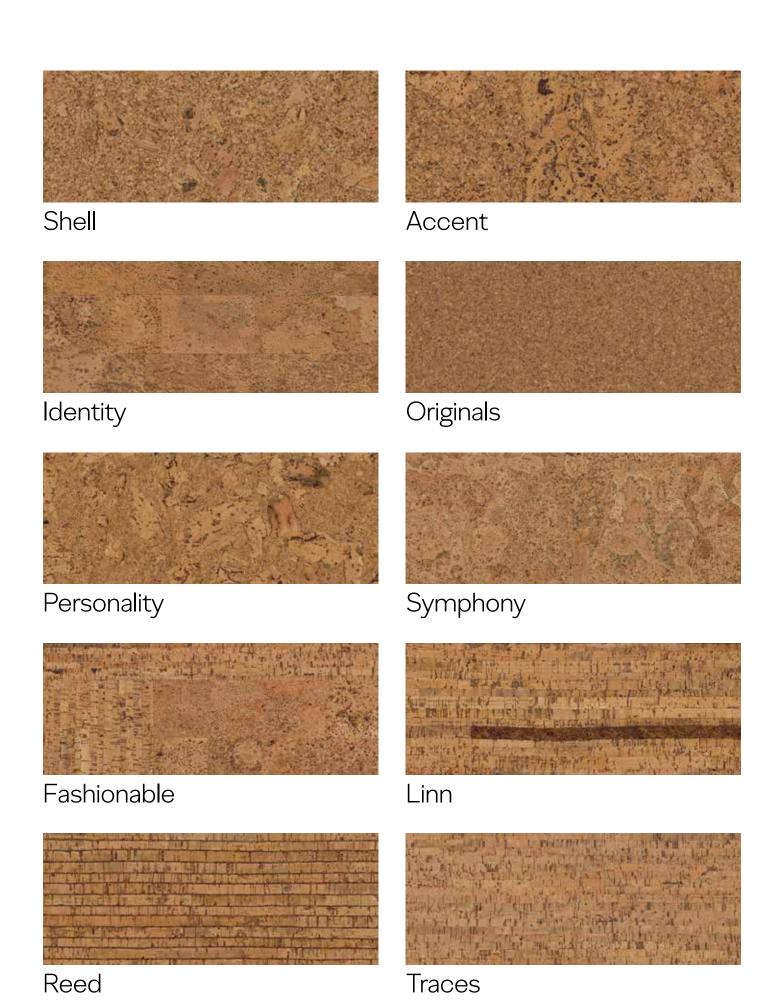

+8 new visuals



C902004 Originals Traditional 80001301



c906002 Originals Medium Light 80001304



С95H001 Charm 80001369



C951001 Allure 80001370



C97W001 Addict 80001390



C97Y001 Serenity 80001391




C9D2001 Blase 80001402



C921001 Originals Harmony 80001313






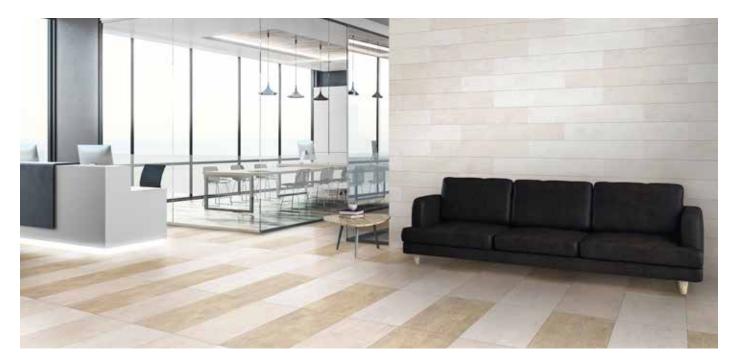

dekwall

A collection of wall coverings with cork visuals that will create the perfect atmosphere. Available in several colors and designs, dekwall will provide a sense of silence and thermal insulation due to the unique properties of cork. AMORIM WISE wall coverings are available with cork looks – natural or painted, and are protected with wax or varnish finishings.

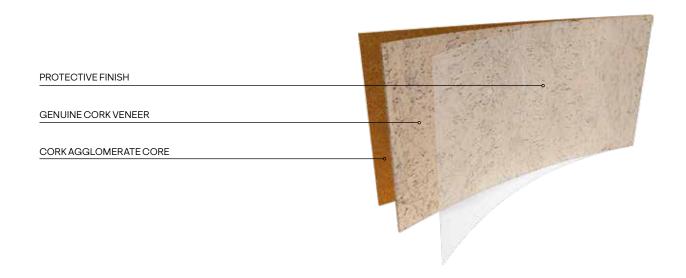

Formats

600 x 300 x 3 mm 231/3 x 112/3 x 1/8"




Finishing



WAX



PU Prefinished

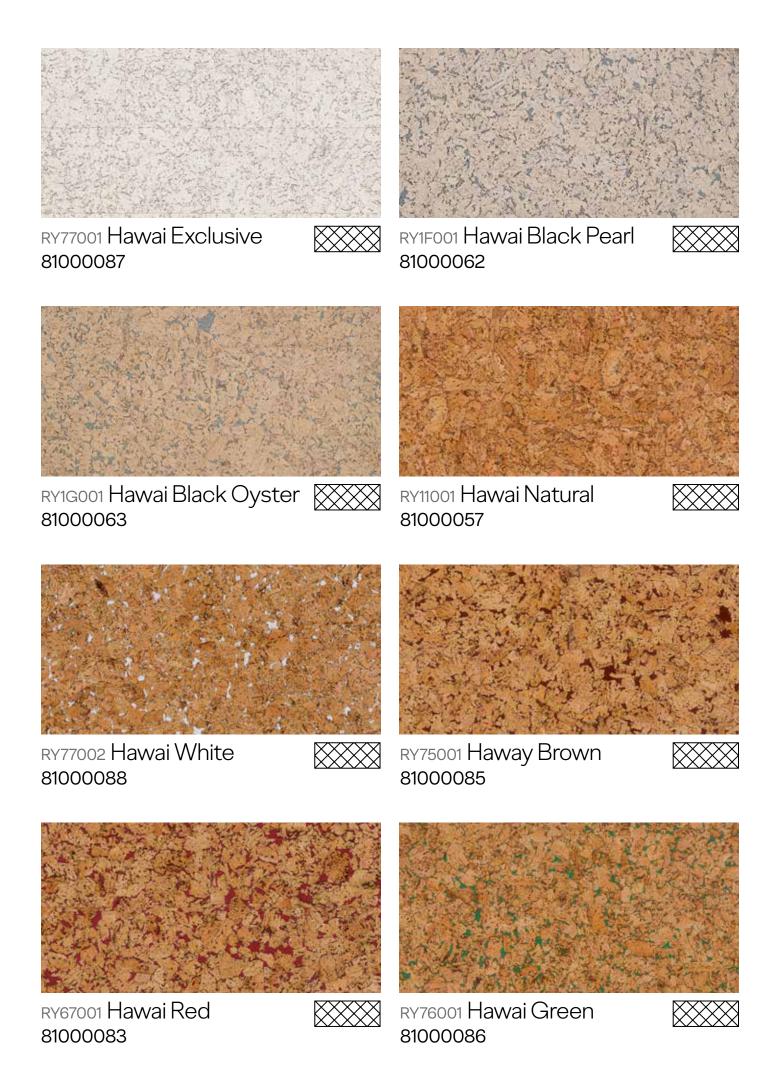



RY1N001 Malta Moonlight 81000001



RY1K001 Malta Platinum 81000065





RY1M001 Malta Champagne 81000067



RY1L001 Malta Chestnut 81000066









RY19002 Fiord Exclusive 81000061



RY19001 Fiord White 81000000



RY43001 Tenerife Natural 81000073



RY15001 Fiord Natural 81000058



RY39002 Tenerife Red 81000070



RY41001 Tenerife Black 81000072







RY07001 Flores White 81000056



RY48001 Bali 81000074







RY40001 Melville 81000071





RY56001 Cayman 81000080





TA01001 Bamboo Artica 81000004



TA05001 Bamboo Toscana 81000095





тао4001 Bamboo Terra 81000094



TA23001 Stone Art Pearl 81000104






TA22001 Stone Art Oyster 81000102



TA24001 Stone Art Platinum 81000106





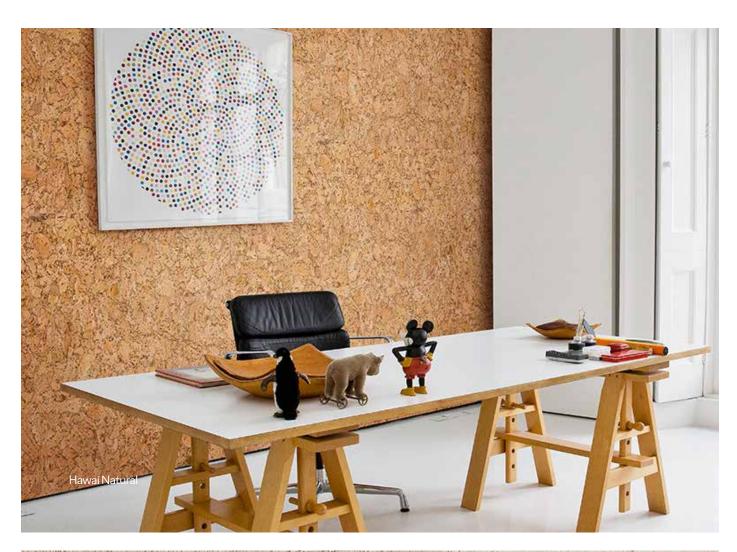





WOOD inspire 700 HRT

Trendy wood visuals designed for a more contemporary look combined with superior comfort and excellent thermal and acoustical performance. These features are provided by the waterproof multilayer cork structure. Unlike hardwood floors, no trees are cut down to produce our products, transforming them in an extremely sustainable solution that contributes to the reduction of global warming potential.



Formats

1225 x 190 x 7 mm 48 15/64 x 7 31/64 x 9/32 "





4 side micro bevel



Finishing & Warranty



HRT - HIGH RESISTANCE TECHNOLOGY

Highly elastic resin, resulting on a natural and flexible surface with a superior wear resistance. HRT is micro scratch resistant, prevents color shading and provides a warm and pleasant feeling on touch. HRT is produced with environmentally sustainable materials.











ADG2001 Washed Haze Oak 80000123





ADF6001 Prime Artic Oak 80000117



ADG1001 Washed Arcaine Oak 80000122







ADK2001 Taupe Washed Oak 80000138



ADG3001 Washed Highland Oak 80000124



ADG4001 Washed Castle Oak 80000125



ADF1001 Dapple Oak 80000112



ADF4001 Classic Prime Oak 80000115





ADF7001 Golden Prime Oak 80000118



ADF8001 Country Prime Oak 80000119



ADG0001 Rustic Forest Oak 80000121




ADF9001 Rustic Eloquent Oak 80000120



ADF3001 Nebula Oak 80000114



ADF2001 Coal Oak 80000113

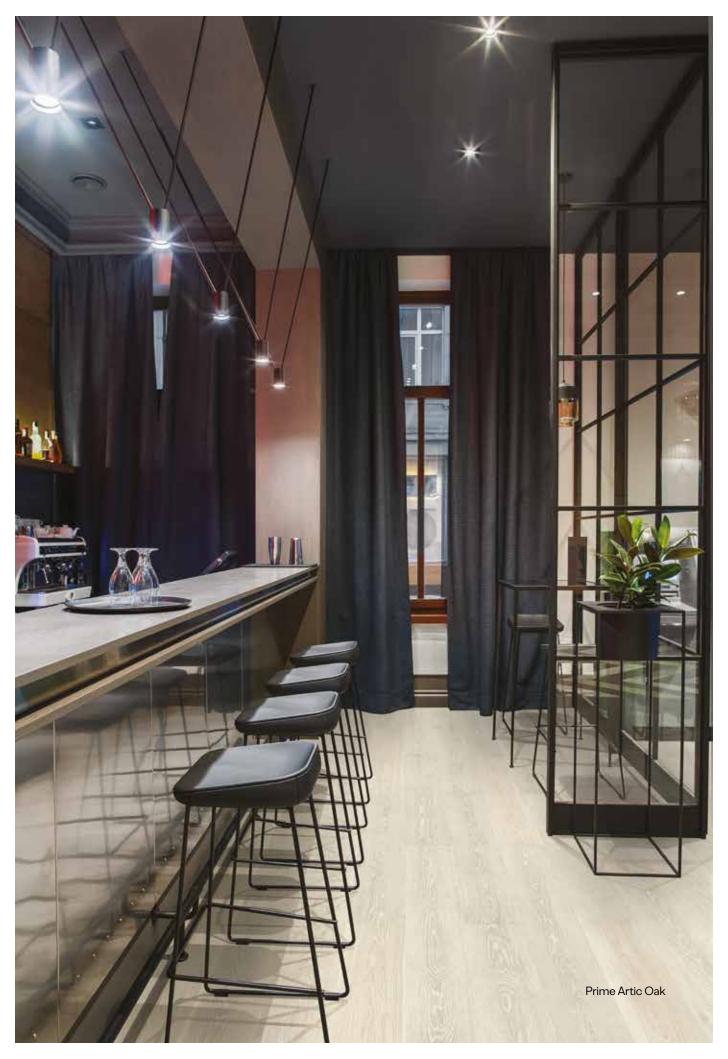

WOOD inspire 700 SRT

The timeless beauty of wood enhanced by cork's unique sustainability and comfort. The PVC free SRT technology is perfect for intensive use in residential and commercial areas due to its superior wear and mechanical resistance. The high end designs are achieved without cutting down trees, while the waterproof multilayered cork structure contributes to the reduction of global warming due to its negative carbon balance.



Formats

1225 x 190 x 7,3 mm 48 15/64 x 7 31/64 x 9/32 "





Floating

4 side micro bevel



Finishing & Warranty



SRT - SUPERIOR RESISTANCE TECHNOLOGY

PVC FREE Superior resistance technology wear layer developed to adapt to the multilayered construction with excellent behavior for heavy commercial traffic. Provides a superior sense of comfort, high mechanical strength and stain resistance.











AEURO01 Beach House 80000160



AEUD001 Contempo Ivory 80000155





AEUA001 Contempo Loft 80000152




AEYF001 Ocean Oak 80000171



AEUMOO1 Natural Light Oak 80000157



AEUKOO1 Natural Dark Oak 80000156

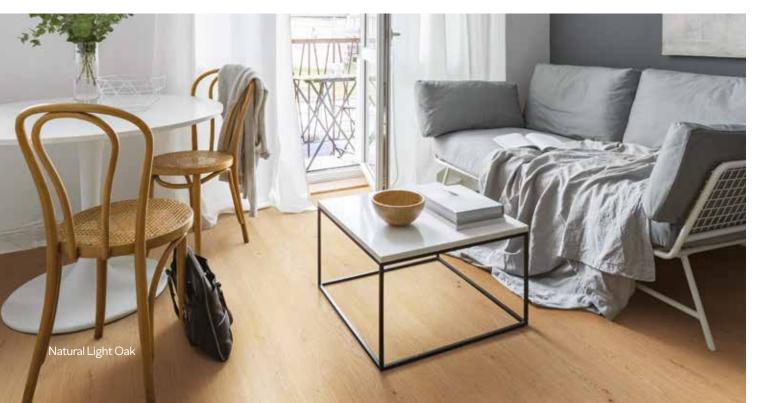



AEYCOO1 Highland Oak 80000168



AEY1001 Diamond Oak 80000173



AEUC001 Contempo Rust 80000154



AEYJ001 Cyber Oak 80000174



AEYD001 Royal Oak 80000169



AEYA001 Mountain Oak 80000166





AEUB001 Contempo Copper 80000153



AEYG001 Field Oak 80000172



AEYE001 Manor Oak 80000170



AEYM001 Quartz Oak 80000177



AEUV001 Mystic Grey Oak 80000164



AEYL001 Mocca Oak 80000176



AEYB001 Sprucewood 80000167



AEUU001 Chocolate Brown Oak 80000163





AEUP001 Treehouse 80000158




AEUW001 Barnwood 80000165



AEUQ001 Farmhouse 80000159



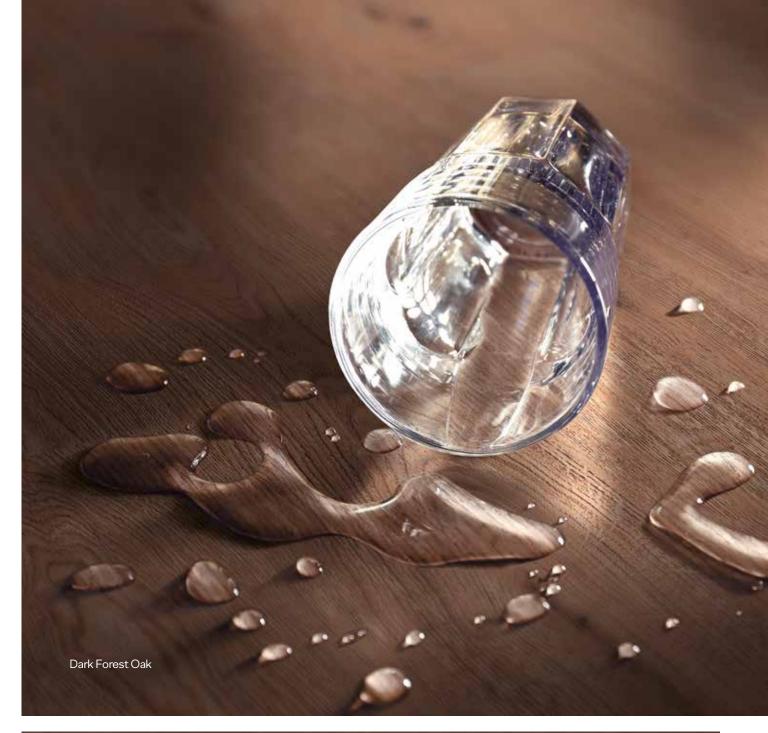



AEUT001 Dark Forest Oak 80000162



АЕУКОО1 Dark Onyx Oak 80000175



Amorim WISE Wood Pro is a low thickness high performance product, ideal for large installation areas. With a curated selection of wood visuals, this glue down sustainable solution is designed to meet the demands of any project, even in high traffic commercial areas.



Formats

1230 x 200 x 4 mm



Finishing & Warranty



SRT - SUPERIOR RESISTANCE TECHNOLOGY

PVC FREE Superior resistance technology wear layer developed to adapt to the multilayered construction with excellent behavior for heavy commercial traffic. Provides a superior sense of comfort, high mechanical strength and stain resistance.











AGY1001 Diamond Oak 80000184



AGYF001 Ocean Oak 80000182



AGYD001 Royal Oak 80000180



AGYA001 Mountain Oak 80000178





AGYE001 Manor Oak 80000181



AGYG001 Field Oak 80000183



AGYM001 Quartz Oak 80000187







AGYL001 Mocca Oak 80000186



AGYB001 Sprucewood 80000179




AGYKOO1 Dark Onyx Oak 80000185

Available other visuals on demand



stone inspire 700 HRT

The beauty of selected stone visuals combined with the unmatched properties of cork. When it comes to superior walking comfort, assuring a perfect temperature year round and a silent environment, this product performs. The HRT surface together with a waterproof cork structure will provide durability and ease of maintenance, while the floating system assures a quick and hassle free installation. The stone designs are achieved without harming Nature and and also retains CO₂ from the atmosphere.

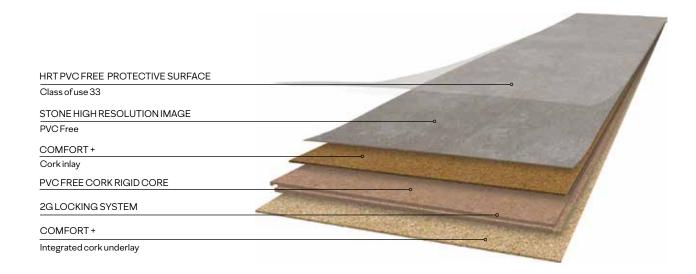

Formats

910 x 300 x 7 mm 35 13/16 x 11 13/16 x 9/32"



Finishing & Warranty



HRT - HIGH RESISTANCE TECHNOLOGY

High elastic resin, resulting on a natural and flexible surface with a superior wear resistance. HRT is micro scratch resistant, prevents color shading and provides a warm and pleasant feeling on touch.










stone pure HRT

High end stone designs, with a distinctive look given by the large tile format. Entirely made out of cork, its superior comfort comes from Nature, providing a warm atmosphere, reducing energy costs and creating silent spaces. This flooring solution also contributes for a better future, since it helps the reduction of global warming.

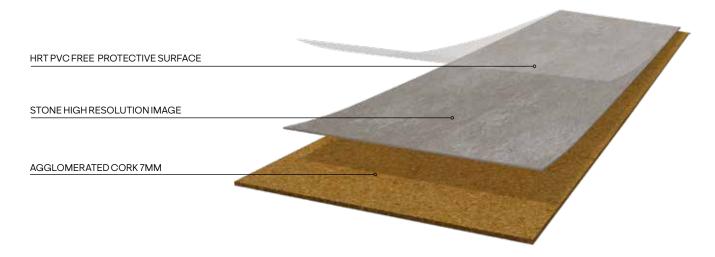

Formats

900 x 600 x 8 mm 35 7/16 x 23 5/8 x 5/16"



Finishing & Warranty



HRT - HIGH RESISTANCE TECHNOLOGY


High elastic resin, resulting on a natural and flexible surface with a superior wear resistance. HRT is micro scratch resistant, prevents color shading and provides a warm and pleasant feeling on touch.









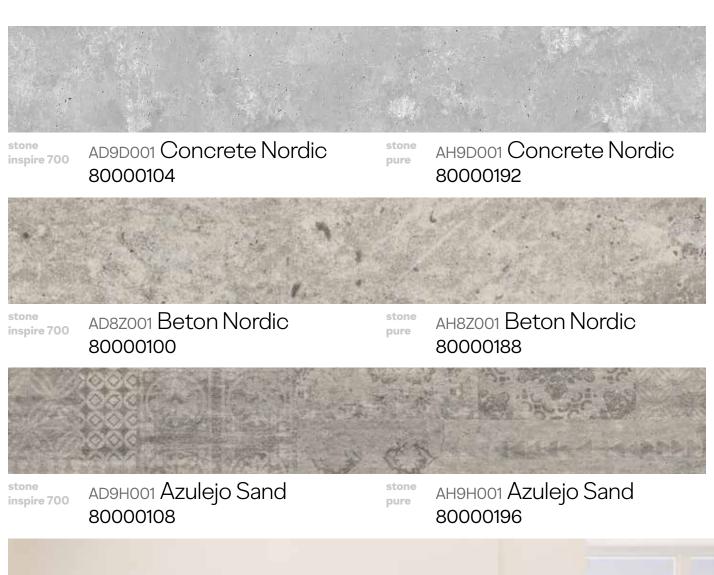







inspire 700

AD9E001 Concrete Urban 80000105

stone pure

AH9E001 Concrete Urban 80000193



stone inspire 700

AD9A001 Beton Urban 80000101

pure

ан9а001 Beton Urban 80000189




stone inspire 700

AD91001 Azulejo Cityzen 80000109

stone pure

AH91001 Azulejo Cityzen 80000197

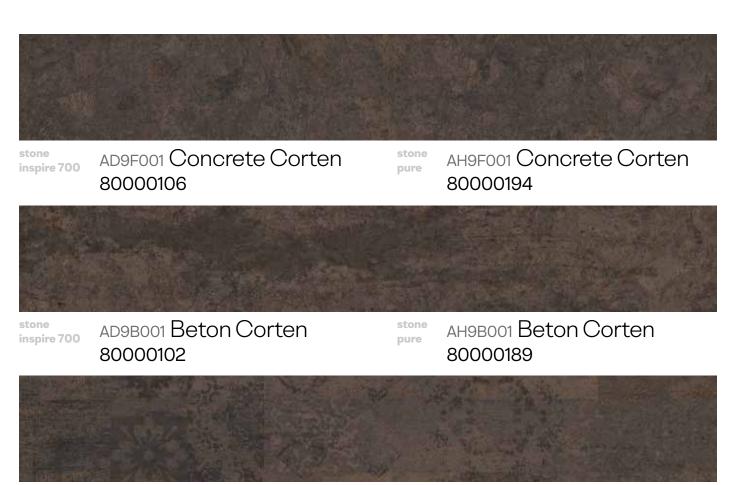








inspire 700

AD9G001 Concrete Midnight 80000107


stone pure AH9G001 Concrete Midnight 80000195

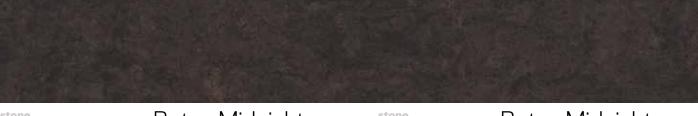

stone inspire 700

AD9C001 Beton Midnight 80000103


stone pure AH9C001 Beton Midnight 80000191

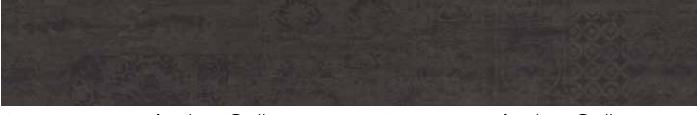

inspire 700

AD9K001 Azulejo Cellar 80000111

stone pure AH9K001 Azulejo Cellar 80000199

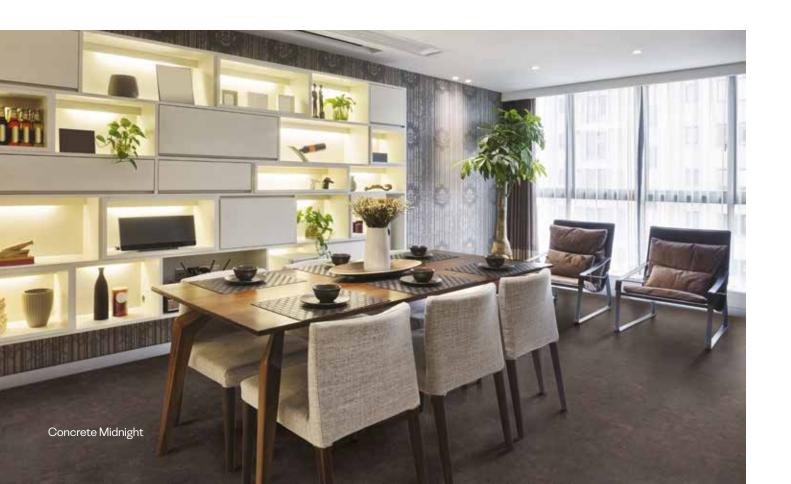

Maintenance

Optimal care for an everlasting beauty

To keep your floor spotless, Amorim has a set of auxiliary products available. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible. To be aligned with Amorim's commitment to wellbeing, we recommend the use of auxiliary products (levelling compounds, primers, adhesives or varnishes) that have low-emissions to the environment.

Regular Maintenance



Soft Cleaner

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.



Spray Cleaner

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.

Skirtings

In order to help create a more classy and harmonious interior, Amorim provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colours.

Contact your supplier for information on the available skirting references.









As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOCemissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Blue Angel is a voluntary certification that follows rigorous environmental standards and is renowned as a reference guide for a more sustainable way of living. Blue Angel is synonym of a product (or service) that meets rigorous criteria of environmental performance such as being PVC free.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.

Technical data sheet

	STANDARD	UNIT / REQUIREMENT	cork pure floor & wall	stone pure
Dimension (LxWxT)	-	mm	600x300x4	900x600x8
Mass per unit	-	Kgs/m²	2,166	4,48
Packaging (box / pallet)	-	m²	7,92/237,6	3,78 / 136,08
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	-	33
GENERAL PROPERTIES - EN 12104				
Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	ENISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0	Complies	Complies
Overall thickness mm	EN ISO 24346	≥ 4,0	Complies	Complies
Apparent density average - individual results	EN ISO 23997	≥ 450 kg/m3	Complies	-
		≥ 500 kg/m3	-	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies	Complies
Curling mm	EN ISO 23999	≤2	Complies	Complies
Residual Indentation	EN ISO 24343-1	≤0,4	Complies	-
		≤0,2	-	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage	No visible damage
SAFETY PROPERTIES - EN 14041				
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-s1	Cfl-S1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable	Undetectable
ADDITIONAL PROPERTIES				
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	13	13
Walking noise	IHD-W431	dB %	Reduction improvement 15,3 dB Difference of loudness 65%	21.9 70
Thermal resistance	EN 12667 / ISO 1957	(m2K)/W	0,15	-
Thermal resistance (Thermal conductivity)	EN ISO 10456	m2·K/W	-	0,102
Stains Resistance	ISO 26987(a)	Grade	Grade 0 - Unchanged	-

STANDARD - TEST METHOD		UNIT	dekwall
Dimension (LxWxT)	EN 427	mm	600 ± 0.5% 300 ± 0.5%
Mass per unit	-	Kg/sqm	0,95
Packaging (box / pallet)	-	sqm	5,94/213,84
Squareness	EN 427	mm	600: < 1.0mm 300: < 0.5mm
Thickness	ISO 7322	mm	3.0 ± 0.3%
Apparent density	EN 672	Kg/m³	≥200
Dimensional stability	EN 434	%	3.0 ± 0.3%
Curling	EN 434	MM	≤6
Moisture content	EN12105	%	≤7
Formaldehyde	EN 12149, method C	mg/Kg	≤95
Vinyl chloride monomer (VCM)	EN12149, TEST B	mg/Kg	≤0,2
Thermal resistance	EN12667	m ² K/w	0.0572 (Varnished) 0.0583 (Waxed)
Reaction to fire	EN 15102: 2007	Class	E
Sound absorption	ISO 354	αw	0,1
Release of heavy metals and specific elements	EN12149		fulfilled

	STANDARD	UNIT / REQUIREMENT	inspire 700 cork wood stone	wood pro
Dimension (LxWxT)	-	mm	1225x190x7 (cork & wood HRT) 1225x190x7,3 (wood SRT) 910x300x7 (stone)	1230x200x4
Mass per unit	-	Kgs/m²	6,53 (cork) / 6,36 (wood SRT) 6,10 (wood HRT) / 6,21 (stone)	4,19
Packaging (box / pallet)	-	m^2	1,862 / 81,928 (cork, wood & stone) 2,184 / 78,624 (stone)	2,46/108,24
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	33	34
Level of use Light Industrial	(*)	Class	-	42
GENERAL PROPERTIES			EN 16511	(**)
	ISO 24337	Δ tavg \leq 0,50 mm, relative to nominal value / tmax - tmin \leq 0,50 mm	Complies	-
Thickness, t -	ISO 24346	nominal value + 0,13 / - 0,10	_	Complies
		≤1500 mm: ∆l ≤ 0,5 mm /	0 1	
Length, I	ISO 24337	>1500 mm: ∆l ≤ 0,3 mm/m	Complies	-
	ISO 24342	≤ 0.15 %		Complies
Width, w	ISO 24337	$\Delta wavg \le 0,10 \ mm, \ relative \ to \ nominal \ value \ / \\ wmax - wmin \le 0,20 \ mm$	Complies	-
		≤ 0,10%	-	Complies
Squareness, q	ISO 24337	max ≤ 0,20 mm	Complies	-
		≤0,25 mm	-	Complies
Straightness, s	ISO 24337	max ≤ 0,30 mm/m	Complies	-
		≤ 0,25 mm	-	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies	-
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies	-
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies	-
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies	-
Curling	EN ISO 23999:2018	≤2mm	-	Complies
Light Fastness	ISO 105-B02:2014	Blue Scale > 6	-	Complies
CLASSIFICATION PROPERTIES - EN 16511				
Wear resistance IP	EN 15468, procedure B	≥ 5 000 cycles	Complies	-
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥1600 mm	Complies	-
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies
Resistance to staining	EN 438-2	Groups1and 2: grade 5 Group 3: grade 4	Complies	Complies
Residual indentation	EN ISO 24343-1	≤ 0,2 mm	Complies	-
		≤0,1mm		-
Swelling	ISO 24336	%	< 2% (cork, wood HRT & stone) < 1% (wood SRT)	< 2%
Dimensional stability due to variation of temperature	EN ISO 23999	≤0,25%	Complies	Complies
Effect of furniture leg	EN 424	-	No Visible Damage	No Visible Damage
WEAR AND PERFORMANCE REQUIREMENTS				
Abrasion resistance	EN 13329:2006+A1:2008 Annex E (Sandpaper-Method)	> 5000 cycles	-	Complies
Micro-scratch	EN 16094	≤MSR-A2	-	Complies
SAFETY PROPERTIES - EN 14041				
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-S1 (cork, wood HRT & stone) Dfl-S1 (wood SRT)	Cfl-S1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable	-
	CEN/TR14823:2004	mg/kg	-	Complies
Electrostatic Behaviour	EN 1815:2016	kV	-	Not Antistatic
ADDITIONAL PROPERTIES			40/ 1	
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	18 (cork, wood HRT & stone) 15 (wood SRT)	10
Walking noise	IHD-W431	dB %	Reduction improvement 18,5 dB Difference of loudness 65%	Reduction improvement 12,6 dB Difference of loudness 57%
Thermal conductivity	EN12667	W/(mK)	0,111	-
Thermal resistance	EN 12667 / ISO 1957	(m2K)/W	0,06	-

www.amorimwise.com

DE BE NE LUX AT CH PT ES FR DK PL US RU IT FI	Amorim Deutschland GmbH Amorim Benelux B.V. Amorim Deutschland GmbH Amorim Flooring Switzerland AG Amorim Cork Flooring, S.A. Amorim Cork Flooring, S.A. Amorim Cork Flooring, S.A. Timberman Denmark A/S Dom Korkowy, Sp. z o.o. Amorim Flooring North America Amorim Flooring Rus, OOO Amorim Cork Flooring, S.A. Korkkitrio Oy	(+49) 4221 5 93-01 (+31) 166 604 111 (+43) 1 54 51 65 10 (+41) 41 726 20 20 (+351) 227 475 600 (+351) 227 475 600 (+33) 800 914 848 (+45) 995 252 52 (+48) 126 379 639 (+1) 410 553 60 62 (+7) 495 280 7860 (+39) 068 635 7287 (+358) 50 554 2616
FI SW	9	, ,
	O	,

info.acf.de@amorim.com info.acf.bnl@amorim.com info.acf.at@amorim.com info.acf.ch@amorim.com info.acf@amorim.com info.acf.es@amorim.com info.acf.fr@amorim.com timberman@timberman.dk krakow@domkorkowy.pl info.acf.us@amorim.com info.acf.ru@amorim.com info.acf.it@amorim.com wicandersmyynti@korkkitrio.fi info.acf.se@amorim.com





INVESTORS IN PE©PLE™ We invest in people Standard